


CARTRIDGE/EXPANSION (44PIN FEMALE) CN6

SCHEMATIC #251469 SHEET 2 OF 2

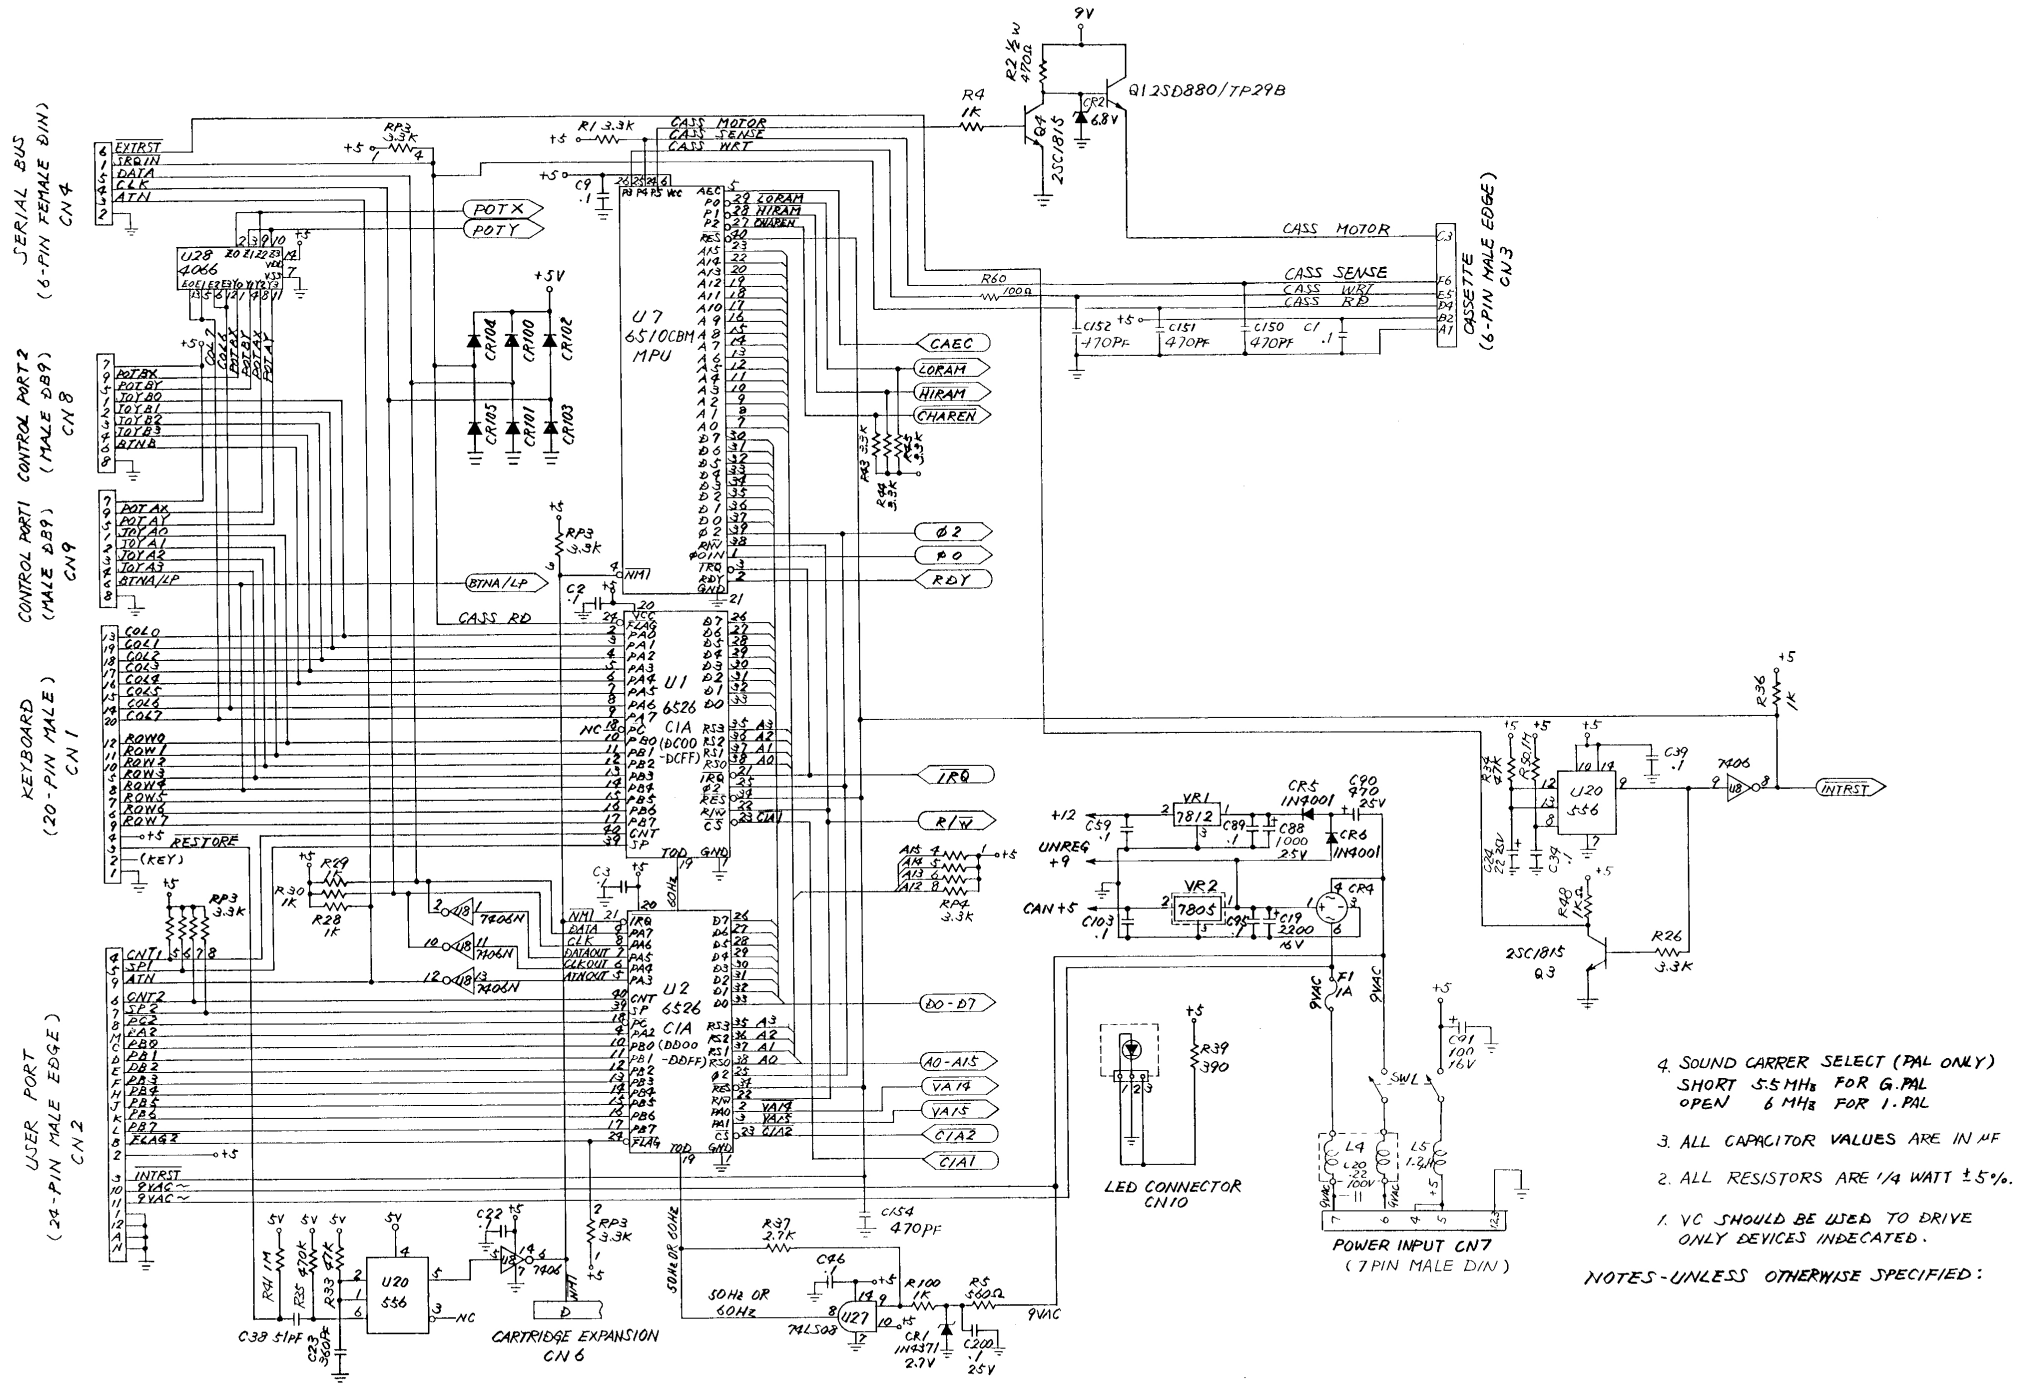

4. SOUND CARRIER SELECT (PAL ONLY)
SHORT 5.5 MHz FOR G.PAL
OPEN 6 MHz FOR I.PAL
3. ALL CAPACITOR VALUES ARE IN MF
2. ALL RESISTORS ARE 1/4 WATT ±5%.
1. VC SHOULD BE USED TO DRIVE ONLY DEVICES INDICATED.

NOTES-UNLESS OTHERWISE SPECIFIED: