


SERIAL BUS (6-PIN FEMALE DIN) CN4
 CONTROL PORT2 (MALE DB9) CN8
 CONTROL PORT1 (MALE DB9) CN9
 KEYBOARD (20-PIN MALE) CN1
 USER PORT (24-PIN MALE EDGE) CN2

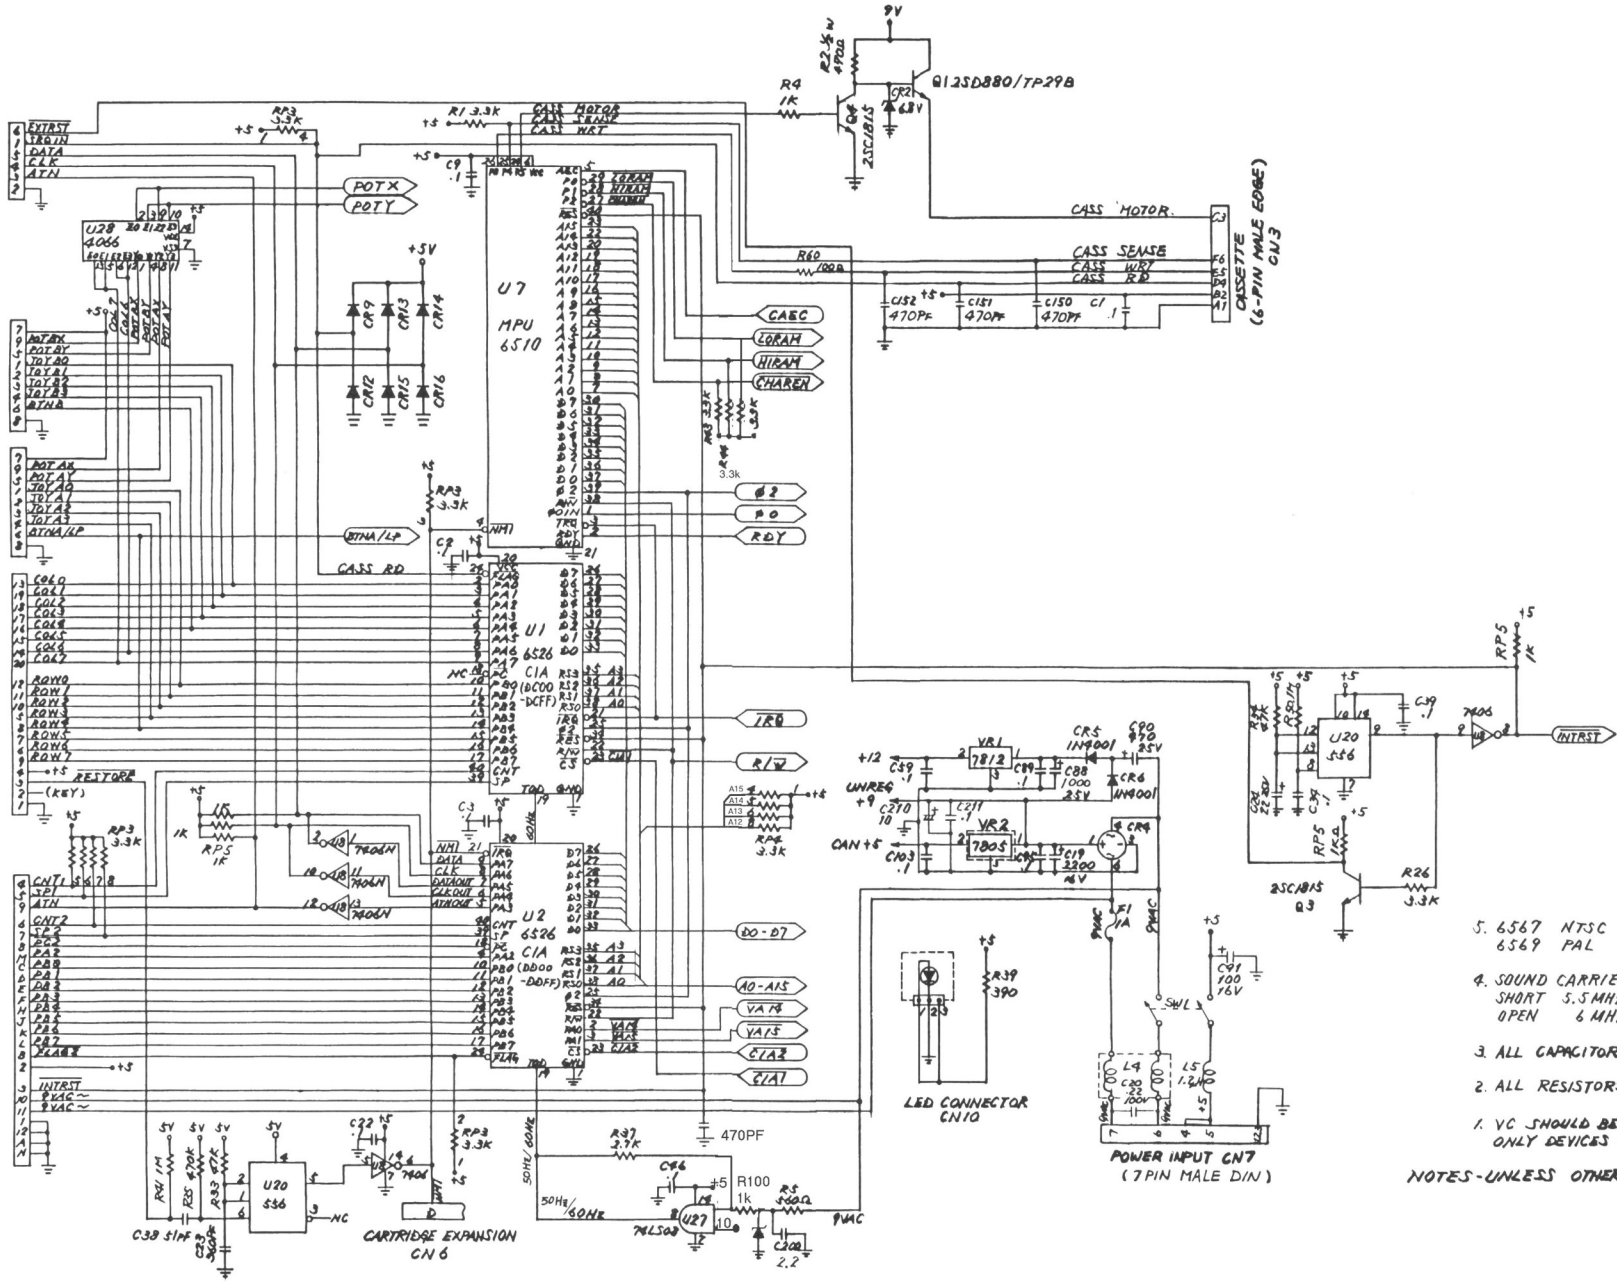

- 5. 6567 NTSC
6569 PAL
- 4. SOUND CARRIER SELECT (PAL OPEN)
SHORT 5.5MHz FOR G. PAL
OPEN 6 MHz FOR I. PAL
- 3. ALL CAPACITOR VALUES ARE IN nF.
- 2. ALL RESISTORS ARE 1/4 WATT ±5%.
- 1. VC SHOULD BE USED TO DRIVE ONLY DEVICES INDICATED.

NOTES-UNLESS OTHERWISE SPECIFIED: